



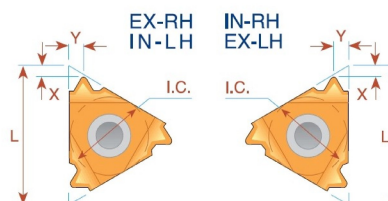

Gewindedrehplatten

MJ - ISO 5855



Steigung mm	L	I.C. Zoll	AUßEN Bestellcode Rechts	INNEN Bestellcode Rechts	X	Y
1.0	11	1/4		11 IR 1.0 MJ	0.7	0.8
1.25	11	1/4		11 IR 1.25 MJ	0.8	0.9
1.5	11	1/4		11 IR 1.5 MJ	0.8	1.0
2.0	11	1/4		11 IR 2.0 MJ	0.9	1.0
1.0	16	3/8	16 ER 1.0 MJ	16 IR 1.0 MJ	0.7	0.8
1.25	16	3/8	16 ER 1.25 MJ	16 IR 1.25 MJ	0.8	0.9
1.5	16	3/8	16 ER 1.5 MJ	16 IR 1.5 MJ	0.8	1.0
2.0	16	3/8	16 ER 2.0 MJ	16 IR 2.0 MJ	1.0	1.3

Bestellbeispiel: 16 ER 1.5 MJ BMA

Typ B

Profilgeschliffen mit gesintertem Spanbrecher

Steigung mm	L	I.C. Zoll	INNEN Bestellcode Rechts	X	Y
1.0	11	1/4	11 IR B 1.0 MJ	0.6	0.6
1.5			11 IR B 1.5 MJ	0.8	0.9



Bestellbeispiel: 11 IR B 1.5 MJ BMA