

CE (Multifunktional)

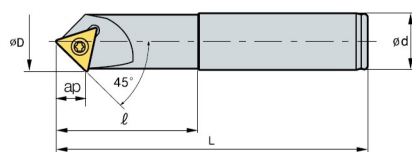


Fig. 1




Fig. 2



· AR : -12° - 15°
· RR : 0°

(mm)										
Bezeichnung	Lager	ØD	Ød	ℓ	L	ap	Fig.	WSP	Bearbeitungs-Durchmesser (Min-Max)	Anwendungsbereich
CE 45-1600R-S12	▲	22	12	40	90	10	2	TWX16R-KC	Ø0-20	Zentrieren Nuten Fasen
CE 45-1600R-S20	▲	22	20	50	110	10	1	TWX16R-KC	Ø0-20	
CE 45-1600R-L20	▲	22	20	60	200	10	1	TWX16R-KC	Ø0-20	
CE 45-2200R-S12	▲	29	12	40	90	14	2	TWX22R-KC	Ø0-27	
CE 45-2200R-S25	▲	29	25	50	110	14	1	TWX22R-KC	Ø0-27	
CE 45-2200R-L25	▲	29	25	60	200	14	1	TWX22R-KC	Ø0-27	

Zubehör



CE _-31_-R-S	FTKA03510	TW15S
--------------	-----------	-------

Wendeschneidplatten

TWX-KC



Bezeichnung	NCM325	NCM335	NC5330	PC3500	PC3600	PC3545	PC9530	PC6510	PC215K	PD2000	CN2000	CN20	CN30	H01	G10	ST30A	ST20	Seite
TWX 16R-KC				▲														E25
TWX 22R-KC				▲														E25