
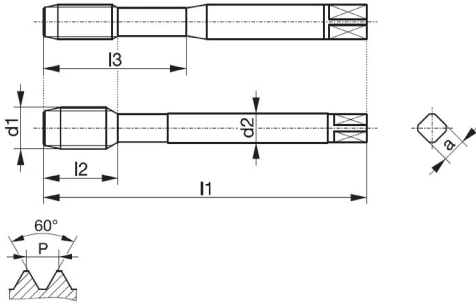



Typenbezeichnung / type / type / tipo / tipo	DOMINANT 1 VA45	DOMINANT 2 VA45		
EG M-Metrisches ISO Regelgewinde DIN 8140 STI Metric (ISO thread DIN 8140) Filetage métrique (pour filets rapportés) DIN 8140 Filettatura metrica (per filetti riportati) DIN 8140 Rosca métrica (para filetes insertos) DIN 8140 DIN 40435 				
Bohrung / bore / type de trou / fori / tipos de agujeros				
Einsatzgebiet / application / application adatto per lavorazione di / aplicación	1.1-1.6 / 2.1-2.3 3.1-3.4 / 5.1-5.3 7.1-7.2	1.1-1.6 / 2.1-2.3 3.1-3.4 / 5.1-5.3 7.1-7.2		
Ausführung / model / exécution / modello / modelo	HL	HL		
Werkstoff / tool material / substrat / materiale / material	HSSE-PM	HSSE-PM		
Gewindetoleranz / thread tolerance / tolérance du filetage / tolleranza di filettatura / tolerancia de la rosca	6H mod	6H mod		
Schafttoleranz / shank tolerance / tolérance de queue / tolleranza del gambo / tolerancia del mango	h9	h9		
Anschnitt / chamfer / entrée / imbocco / entrada	E / 1,5-2	E / 1,5-2		
Ød ₁ P l ₁ l ₂ l ₃ Ød ₂ a 	Identnummer / identification number / code article / codice / número de identificación			
EG-M 2 0,4 50 9 14 2,8 2,1 2,1	025654			
EG-M 2,5 0,45 56 7 18 3,5 2,7 2,65	025655			
EG-M 3 0,5 63 8 21 4,5 3,4 3,15	025658			
EG-M 3,5 0,6 70 9 25 6 4,9 3,7	025659			
EG-M 4 0,7 70 9 25 6 4,9 4,2	025660			
EG-M 5 0,8 80 10 30 6 4,9 5,25	025661			
EG-M 6 1 90 13 35 8 6,2 6,3	025663			
EG-M 8 1,25 100 15 39 10 8 8,4	025664			
EG-M 10 1,5 100 15 - 9 7 10,5	025665			
EG-M 12 1,75 110 20 - 11 9 12,5	025667			
EG-M 16 2 125 25 - 14 11 16,5	110494			
EG-M 20 2,5 160 30 - 18 14,5 20,8	025668			

Maschinengewindebohrer

machine taps / tarauds machine / maschi a macchina / machos para roscado a máquina

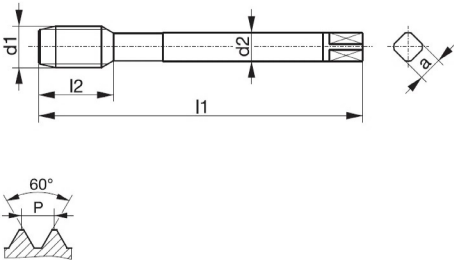


Typenbezeichnung / type / type / tipo / tipo										DOMINANT 2 VA45		
EG MF-Metrisches ISO Feingewinde DIN 8140 STI Metric ISO fine thread DIN 8140 Filetage métrique ISO à pas fin (pour filets rapportés) DIN 8140 Filettatura metrica ISO passo fine (per filetti riportati) DIN 8140 Rosca métrica fina (para filetes insertos) ISO DIN 8140 DIN 40435												
												
Bohrung / bore / type de trou / fori / tipos de agujeros												
Einsatzgebiet / application / application adatto per lavorazione di / aplicación										1.1-1.6 / 2.1-2.3 3.1-3.4 / 5.1-5.3 7.1-7.2		
Ausführung / model / exécution / modello / modelo										HL		
Werkstoff / tool material / substrat / materiale / material										HSSE-PM		
Gewindetoleranz / thread tolerance / tolérance du filetage / tolleranza di filettatura / tolerancia de la rosca										6H mod		
Schafttoleranz / shank tolerance / tolérance de queue / tolleranza del gambo / tolerancia del mango										h9		
Anschnitt / chamfer / entrée / imbocco / entrada										E / 1,5-2		
Ød₁ P I₁ I₂ I₃ Ød₂ a 										Identnummer / identification number / code article / codice / número de identificación		
EG-MF	8	x	1	90	12	-	7	5,5	8,3	025669		
EG-MF	10	x	1	100	15	-	9	7	10,3	025670		
EG-MF	12	x	1	100	15	-	11	9	12,3	025671		
EG-MF	12	x	1,5	100	15	-	11	9	12,5	025672		
EG-MF	14	x	1,25	100	15	-	12	9	14,4	025673		
EG-MF	14	x	1,5	100	15	-	12	9	14,5	025674		
EG-MF	16	x	1,5	110	18	-	14	11	16,5	025675		
EG-MF	20	x	1,5	125	18	-	18	14,5	20,5	025676		

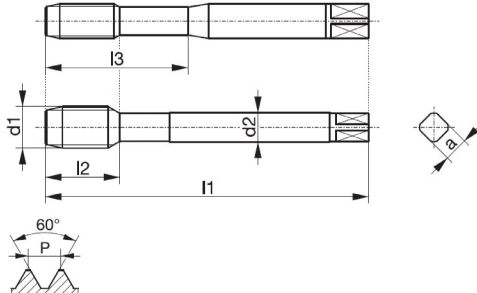Typenbezeichnung / type / type / tipo / tipo	DOMINANT 1 VA45	DOMINANT 2 VA45		
EG UNC-Grobgewinde ASME B18.29.1 STI Unified coarse thread ASME B18.29.1 Filetage américain à pas gros (pour filets rapportés) ASME B18.29.1 Filettatura grossa unificata (per filetti riportati) ASME B18.29.1 Rosca unificada gruesa (para filetes insertos) ASME B18.29.1 DIN 2184-1 				
Bohrung / bore / type de trou / fori / tipos de agujeros				
Einsatzgebiet / application / application adatto per lavorazione di / aplicación	1.1-1.6 / 2.1-2.3 3.1-3.4 / 5.1-5.3 7.1-7.2	1.1-1.6 / 2.1-2.3 3.1-3.4 / 5.1-5.3 7.1-7.2		
Ausführung / model / exécution / modello / modelo	HL	HL		
Werkstoff / tool material / substrat / materiale / material	HSSE-PM	HSSE-PM		
Gewindetoleranz / thread tolerance / tolérance du filetage / tolleranza di filettatura / tolerancia de la rosca	3B	3B		
Schafttoleranz / shank tolerance / tolérance de queue / tolleranza del gambo / tolerancia del mango	h9	h9		
Anschnitt / chamfer / entrée / imbocco / entrada	E / 1,5-2	E / 1,5-2		
Ød₁ P l₁ l₂ l₃ Ød₂ a 	Identnummer / identification number / code article / codice / número de identificación			
EG-UNC No3 - 48 56 7 20 4 3 2,7	025678			
EG-UNC No4 - 40 63 8 21 4,5 3,4 3,1	025679			
EG-UNC No5 - 40 63 8 21 4,5 3,4 3,4	025680			
EG-UNC No6 - 32 70 9 25 6 4,9 3,8	025681			
EG-UNC No8 - 32 80 10 30 6 4,9 4,4	025682			
EG-UNC No10 - 24 80 10 30 7 5,5 5,2	025683			
EG-UNC 1/4" - 20 90 13 35 8 6,2 6,7	025685			
EG-UNC 5/16" - 18 100 15 39 10 8 8,4	025689			
EG-UNC 3/8" - 16 100 15 - 9 7 10	025687			
EG-UNC 7/16" - 14 110 20 - 11 9 11,7	025690			
EG-UNC 1/2" - 13 110 20 - 12 9 13,3	025684			
EG-UNC 5/8" - 11 125 25 - 14 11 16,5	025688			
EG-UNC 3/4" - 10 140 25 - 18 14,5 19,75	025686			

Maschinengewindebohrer

machine taps / tarauds machine / maschi a macchina / machos para roscado a máquina

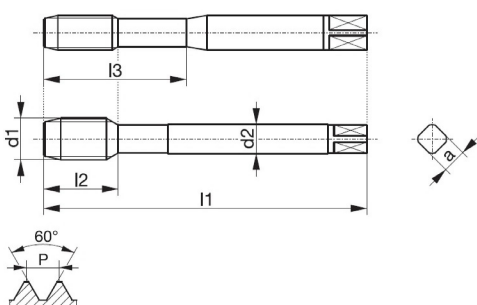

Typenbezeichnung / type / type / tipo / tipo	DOMINANT 1 VA45	DOMINANT 2 VA45		
EG UNF-Feingewinde ASME B18.29.1 STI Unified fine thread ASME B18.29.1 Filetage américain à pas fin (pour filets rapportés) ASME B18.29.1 Filettatura fine unificata (per filetti riportati) ASME B18.29.1 Rosca unificada fina (para filetes insertos) ASME B18.29.1 DIN 2184-1 				
Bohrung / bore / type de trou / fori / tipos de agujeros				
Einsatzgebiet / application / application adatto per lavorazione di / aplicación	1.1-1.6 / 2.1-2.3 3.1-3.4 / 5.1-5.3 7.1-7.2	1.1-1.6 / 2.1-2.3 3.1-3.4 / 5.1-5.3 7.1-7.2		
Ausführung / model / exécution / modello / modelo	HL	HL		
Werkstoff / tool material / substrat / materiale / material	HSSE-PM	HSSE-PM		
Gewindetoleranz / thread tolerance / tolérance du filetage / tolleranza di filettatura / tolerancia de la rosca	3B	3B		
Schafttoleranz / shank tolerance / tolérance de queue / tolleranza del gambo / tolerancia del mango	h9	h9		
Anschnitt / chamfer / entrée / imbocco / entrada	E / 1,5-2	E / 1,5-2		
Ød ₁ P l ₁ l ₂ l ₃ Ød ₂ a 	Identnummer / identification number / code article / codice / número de identificación			
EG-UNF No6 - 40 70 9 25 6 4,9 3,7	025697			
EG-UNF No8 - 36 80 10 30 6 4,9 4,4	025701			
EG-UNF No10 - 32 80 10 30 6 4,9 5,1	025698			
EG-UNF 1/4" - 28 90 13 35 8 6,2 6,6	025699			
EG-UNF 5/16" - 24 90 12 39 10 8 8,25	025700			
EG-UNF 3/8" - 24 90 12 - 8 6,2 9,8	025694			
EG-UNF 7/16" - 20 100 15 - 9 7 11,5	025696			
EG-UNF 1/2" - 20 100 15 - 11 9 13,1	025692			
EG-UNF 5/8" - 18 110 18 - 14 11 16,25	025695			
EG-UNF 3/4" - 16 125 18 - 16 12 19,5	025693			